

20' INSERT FLAT PACK

Basic Features
External size: 6058X2438X2591mm/20'x8'x8'6'' Internal Size: 5858X2331X2329mm
Tare weight: 1970kg
Roof: <ul style="list-style-type: none">➤ Insulation Thickness: 100 mm➤ Exterior Covering: 0.6 mm galvanised sheet metal(GS), double folded along whole container length➤ Top end / side rail: t3.0mm Q235A➤ Ceiling : 9.0 mm Melamine, white <input type="checkbox"/> Type A:PPG, 0.5mm+rock wool+ Plywood. <input type="checkbox"/> Type B:PPG,0.5mm+ Polystyrene(PS)+Sandwich Panel(PPG+PS+PPG)
Floor: <ul style="list-style-type: none">➤ Insulation Thickness: 110 mm➤ Sub-floor: t0.5mm PPG➤ Bottom end / side rail: t4.0mm Q235A➤ Cross-member: t3.0mm Q235A➤ Forklift pocket opening in 250x84, the centre distance is 1500mm➤ Floor Plate: t20mm Plywood.➤ PVC Plate: t2.0mm PVC as marble color
Side walls: <ul style="list-style-type: none">➤ Insulation thickness: 60 mm➤ Total fourteen sets side walls, all of them can be exchanged➤ Structure Option: <input type="checkbox"/> Type A: Pre-painted galvanised steel plate(PPG), 0.5 mm + insulation + PPG, 0.5 mm(Basic) <input type="checkbox"/> Type B: 9 mm Melamine +Wood Bond, insulation+ PPG, 0.5 mm
Door: <ul style="list-style-type: none">➤ Aluminium frame structure with 35mm altitudinal door sill➤ 0.5mm PPG as outer & inner panel➤ 50 mm Polystyrene insulation➤ Size: 900X2120mm
Windows: <ul style="list-style-type: none">➤ Two pcs steel reinforced plastic two-way tipping type as 900x1200mm with double glasses and windows blind➤ The side panel with windows can be changed location by client
Electrical System: <ul style="list-style-type: none">➤ 220/380V, 50 Hz➤ One electric control box located in the roof➤ Two sets of roof lights:2X36W➤ Three electrical outlets located under windows➤ Certification: CCC. CE. UL

Intercon Modular, LLC
www.inter-con.us
+1-801-705-4567
(f) +1-801-2212587
richard.hill@inter-con.us


Preservation:

- The outside panel's colour of all side wall can be chosen among latifoliolate green 319, ocean blue 404, light gray 804
- Container frame can be painted same as outside panel of side wall

Insulation material Option:

- Rock Wool (basic version)
- Polystyrene (PS)
- Polyurethane (PU) Foam

Assume Layout as Required of Client

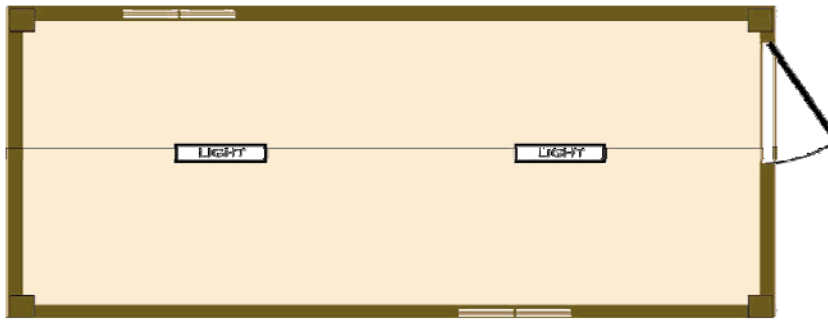

Intercon Modular, LLC
www.inter-con.us
+1-801-705-4567
(f) +1-801-2212587
richard.hill@inter-con.us



Update Time: Sep, 2007