

# 20' INSERT FLAT PACK

<b>Basic Features</b>
<b>External size:</b> 6058X2438X2591mm/20'x8'x8'6'' <b>Internal Size:</b> 5858X2331X2329mm
<b>Tare weight:</b> 1970kg
<b>Roof:</b> <ul style="list-style-type: none"><li>➤ Insulation Thickness: 100 mm</li><li>➤ Exterior Covering: 0.6 mm galvanised sheet metal(GS), double folded along whole container length</li><li>➤ Top end / side rail: t3.0mm Q235A</li><li>➤ Ceiling :                    9.0 mm Melamine, white</li></ul> <input type="checkbox"/> Type A:PPG, 0.5mm+rock wool+ Plywood. <input type="checkbox"/> Type B:PPG,0.5mm+ Polystyrene(PS)+Sandwich Panel(PPG+PS+PPG)
<b>Floor:</b> <ul style="list-style-type: none"><li>➤ Insulation Thickness:        110 mm</li><li>➤ Sub-floor:                    t0.5mm PPG</li><li>➤ Bottom end / side rail:       t4.0mm Q235A</li><li>➤ Cross-member:               t3.0mm Q235A</li><li>➤ Forklift pocket opening in 250x84, the centre distance is 1500mm</li><li>➤ Floor Plate:                    t20mm Plywood.</li><li>➤ PVC Plate:                    t2.0mm PVC as marble color</li></ul>
<b>Side walls:</b> <ul style="list-style-type: none"><li>➤ Insulation thickness: 60 mm</li><li>➤ Total fourteen sets side walls, all of them can be exchanged</li><li>➤ <b>Structure Option:</b></li></ul> <input type="checkbox"/> Type A: Pre-painted galvanised steel plate(PPG), 0.5 mm + insulation + PPG, 0.5 mm(Basic) <input type="checkbox"/> Type B: 9 mm Melamine +Wood Bond, insulation+ PPG, 0.5 mm
<b>Door:</b> <ul style="list-style-type: none"><li>➤ Aluminium frame structure with 35mm altitudinal door sill</li><li>➤ 0.5mm PPG as outer &amp; inner panel</li><li>➤ 50 mm Polystyrene insulation</li><li>➤ Size: 900X2120mm</li></ul>
<b>Windows:</b> <ul style="list-style-type: none"><li>➤ Two pcs steel reinforced plastic two-way tipping type as 900x1200mm with double glasses and windows blind</li><li>➤ The side panel with windows can be changed location by client</li></ul>
<b>Electrical System:</b> <ul style="list-style-type: none"><li>➤ 220/380V, 50 Hz</li><li>➤ One electric control box located in the roof</li><li>➤ Two sets of roof lights:2X36W</li><li>➤ Three electrical outlets located under windows</li><li>➤ Certification: CCC. CE. UL</li></ul>

Intercon Modular, LLC  
www.inter-con.us  
+1-801-705-4567  
(f) +1-801-2212587  
richard.hill@inter-con.us



**Preservation:**

- The outside panel's colour of all side wall can be chosen among latifoliolate green 319, ocean blue 404, light gray 804
- Container frame can be painted same as outside panel of side wall

**Insulation material Option:**

- Rock Wool (basic version)
- Polystyrene (PS)
- Polyurethane (PU)Foam

**Assume Layout as Required of Client**

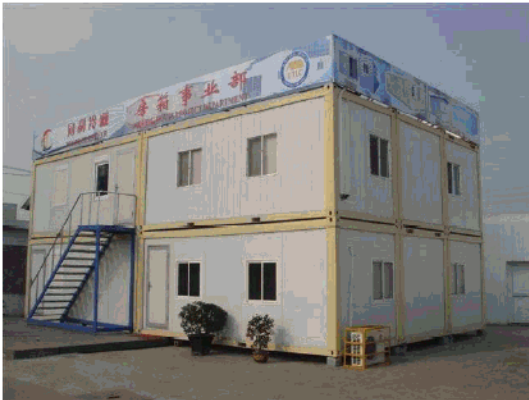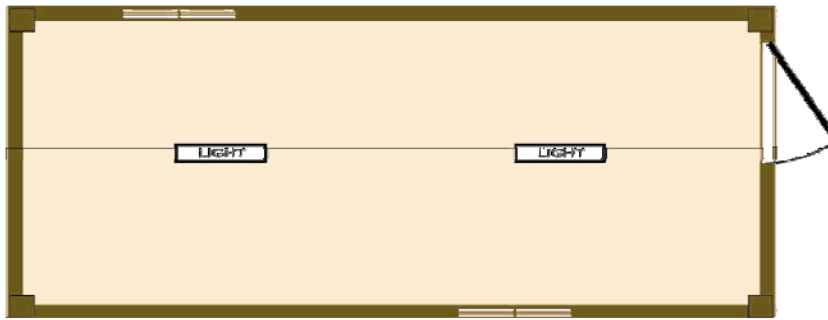

Intercon Modular, LLC  
www.inter-con.us  
+1-801-705-4567  
(f) +1-801-2212587  
richard.hill@inter-con.us



Update Time: Sep, 2007